

Fang™ 26T & 28T

Mid-Size Walk-Behind Automatic Scrubbers

Simple, rugged and affordable


www.usviper.com



Easy-to-use, fingertip controls.



Engineered to withstand heavy, daily use in commercial applications such as schools, office buildings, and medical facilities.

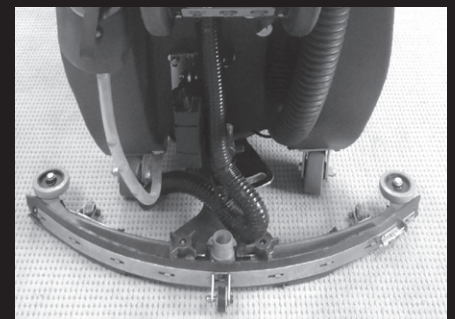

Parabolic squeegee for easy and complete solution pick-up.

PART OF THE NILFISK GROUP



Fang™ 26T & 28T

Mid-Size Walk-Behind Automatic Scrubbers

Simple

- Easy-to-use, fingertip controls
- Forward and reverse drive
- All operational functions are within easy reach
- Parabolic squeegee for easy and complete solution pick-up
- Free online training video shows use and care of scrubber for optimal performance

Rugged

- 5-year parts warranty
- 2-year warranty on labor
- Transaxle drive
- Heavy-duty, cast aluminum squeegee assembly
- Engineered to withstand heavy, daily use in commercial applications such as schools, office buildings, and medical facilities

Affordable

- Best value in the industry
- Charger, pad drivers, and squeegee assembly included
- High cleaning productivity rate
- Extra set of squeegee blades included and stored onboard
- Backed by the most extensive, hassle-free warranty in the business

Technical Specifications

Description	Fang™ 26T	Fang™ 28T
Cleaning Path	26 in (66 cm)	28 in (71.1 cm)
Solution Tank	17 gal (64.3 L)	17 gal (64.3 L)
Recovery Tank	17 gal (64.3 L)	17 gal (64.3 L)
Pad Size	2 x 13 in (2 x 33 cm)	2 x 14 in (2 x 35.6 cm)
Pad Pressure, Variable	Up to 150 lbs (68 kg)	Up to 150 lbs (68 kg)
Squeegee, Easy to Remove	32 in (81.3 cm)	36 in (91.4 cm)
Speed Control	Variable fwd./rev.	Variable fwd./rev.
Cleaning Productivity (Max)	26,000 ft ² /hr (2,415 m ² /hr)	28,000 ft ² /hr (2,601 m ² /hr)
Drive System	0.33 hp (0.24 kW), transaxle	0.33 hp (0.24 kW), transaxle
Wheels, Non-marking Grey	(2) 8 in (20.3 cm)	(2) 8 in (20.3 cm)
Brush Motor, rpm Speed	0.75 hp (0.55 kW), 200 rpm	0.75 hp (0.55 kW), 200 rpm
Vacuum Motor, Waterlift	3-stage, 67 in (170 cm)	3-stage, 67 in (170 cm)
Optional Batteries	Two 12 V, 215 amp/hr	Two 12 V, 215 amp/hr
Charger	18-amp, shelf charger	18-amp, shelf charger
Run Time per Charge	Approx. 4.5-5 hrs	Approx. 4.5-5 hrs
Weight without Batteries	287 lbs (130 kg)	291 lbs (132 kg)
Ship Weight w/o Batteries	440 lbs (199.5 kg)	445 lbs (202 kg)
Dimensions (L x W x H)	55.5 in x 27.9 in x 39.4 in (141 cm x 71 cm x 100 cm)	55.5 in x 29.9 in x 39.4 in (141 cm x 76 cm x 100 cm)
Model Number	FANG26T (without batteries) FANG26T-215 (with batteries)	FANG28T (without batteries) FANG28T-215 (with batteries)

Specifications are subject to change without notice.



9435 Winnetka Avenue North
Brooklyn Park, MN 55445
Phone: 800.989.2235
Fax: 800.989.6566

240 Superior Boulevard
Mississauga, Ontario, Canada L5T 2L2
Phone: 800.668.8400
Fax: 800.263.5111

©2017 Nilfisk, Inc. Form L3342V 8-24-17